



8-segment redundant fieldbus power system for use with Yokogawa CENTUM 3000 R3 Control System Ring Terminal Terminations

F880-RT



- ◆ Integrated redundant fieldbus power for ALF111 FOUNDATION fieldbus™ cards
- ◆ High-density, compact design
- ◆ Fully isolated
- ◆ Hot swappable power modules*
- ◆ Low power dissipation
- ◆ Zero component carrier
- ◆ On-line diagnostics option
- ◆ Redundant power & conditioning
- ◆ Vertical DIN-rail mounting
- ◆ F801 output 21.5V, 350mA
- ◆ F802 output 28V, 500mA

The **F880-RT fieldbus power system** is designed to provide redundant power for eight FOUNDATION fieldbus™ H1 segments when used with Yokogawa ALF111 fieldbus cards. The F880-CA-RT module carrier has system connectors for direct connection to two redundant pairs of fieldbus cards using Yokogawa AKB336 cables. Power for the fieldbus segments is provided by two power modules - F801s or F802s - operating in a redundant configuration (load sharing). Failure alarms, galvanic isolation, power conditioning and segment termination are incorporated into each F80x module. In simplex applications, a single F80x module may be used. Termination of the fieldbus segments is automatically maintained when single or redundant F80x modules are fitted.

For extreme reliability, the module carrier has no components and only provides interconnections between the power modules and external connections. It is supported in a rigid metal frame that protects the circuit board from mechanical damage. Secure DIN-rail mounting is provided by integrated fixings.

Each F80x module monitors the output of the eight fieldbus segments and indicates an alarm, by means of a built-in, normally closed relay, if any of the segments is shorted or below the minimum output voltage threshold. Failure of either of the bulk power input supplies is also annunciated. The alarm contacts are volt-free and galvanically isolated from other circuitry.

Connections to the alarm relays are made via terminals on the F880-CA-RT carrier. A separate alarm module is not required for this function. LED indicators also show the status of each F80x module and the eight individual segments. In normal operation, each segment LED is lit, showing that the segment is powered. If a segment is shorted, this LED is extinguished, and the module Alarm LED is lit.

A separate physical layer diagnostics module may be installed on the carrier to automatically collect and distribute additional diagnostic information for each of the eight fieldbus segments. For more information see the F809F product specification.

The F80x module provides galvanic isolation between the 24V DC input power and the fieldbus segments, as required by the IEC61158-2 fieldbus standard and the Fieldbus Foundation™ FF-831 validation test for fieldbus power supplies. There is also galvanic isolation between the fieldbus segments, thereby preventing multiple segment failures due to ground faults on more than one segment. Each segment has its own fieldbus power conditioner and current limitation.

Redundant 24V DC (nom.) input power is connected to the F880-CA-RT carrier using ring terminals that are attached to the barrier strip on the carrier. Field wiring connections are made in the same manner.

* Gas clearance certificate needed in Zone 2 hazardous areas

FOUNDATION fieldbus™ is a trademark of Fieldbus Foundation™, Austin, Texas.



EUROPE (EMEA)
AMERICAS
ASIA PACIFIC

Tel: +44 (0)1582 723633
Tel: +1 281 571 8065
Tel: +65 6 487 7887

Fax: +44 (0)1582 422283
Fax: +1 281 571 8069
Fax: +65 6 487 7997

E-mail: enquiry@mtl-inst.com MTL web site: www.mtl-fieldbus.com Relcom web site: www.relcominc.com

F880-RT:
PS-064 F880-RT Product Specification
Revision: C
www.relcominc.com

SPECIFICATION

Location of equipment

Safe area,
Class I Zone 2 IIC T4

INPUT

Input voltage (DC) F801 19.2 - 30.0V F802 19.2 - 30.0V

Current consumption (24V input, all outputs fully loaded) F801 3.5A* F802 6A*

Total Power dissipation (24V input, all outputs fully loaded) F801 20W* F802 24W*

* Redundant operation

OUTPUT

Number of channels F801 Eight (8) F802 Eight (8)

Voltage (DC) F801 21.5V - 24.0V F802 28.0V - 30.0V

Design current (per segment) F801 0 to 350mA F802 0 to 500mA

Current limit F801 > 370mA F802 > 520mA

Minimum load F801 0mA F802 0mA

Isolation

Fieldbus to input power: 250V AC rms withstand
Segment to segment: 200V DC withstand

ALARMS

Alarm contact rating

1A maximum @ 30V DC maximum

Alarm contact status

Normally closed

Alarm threshold

Segment output F801 <19V DC F802 <24V DC

ELECTRICAL CONNECTIONS

System connectors

Host 1A, Host 1B, Host 2A, Host 2B via AKB336 cables to ALF111 modules

Fieldbus Wiring

Segments 1-8, 2-way barrier strip for use with ring terminals.

Fieldbus Power Input

Power A, Power B, 2-way barrier strip for use with ring terminals

Chassis ground and Alarm contacts

2-way barrier strip for use with ring terminals

Note: Barrier strip supports up to 8mm ring terminals with hole sizes from 3.5mm to 5.0mm

ENVIRONMENTAL

Ambient temperature	F801	F802
Operating (full load)	-40°C to +65°C	-40°C to +50°C
Operating (60% load)	-40°C to +65°C	-40°C to +65°C
Storage	-40°C to +85°C	-40°C to +85°C

Note: Temperature range applies only when mounted on a vertical DIN rail.

Ingress protection

IP20 to BS EN60529 (Additional protection by use of enclosure)

MECHANICAL

Mounting method


Integrated fixings for 'Top hat' DIN rail, 35mm x 7.5mm to EN50022

ELECTRICAL

EMC Compliance

To EN61326:1998 Electrical equipment for measurement, control and laboratory use - EMC requirements

F880-RT - BLOCK DIAGRAM

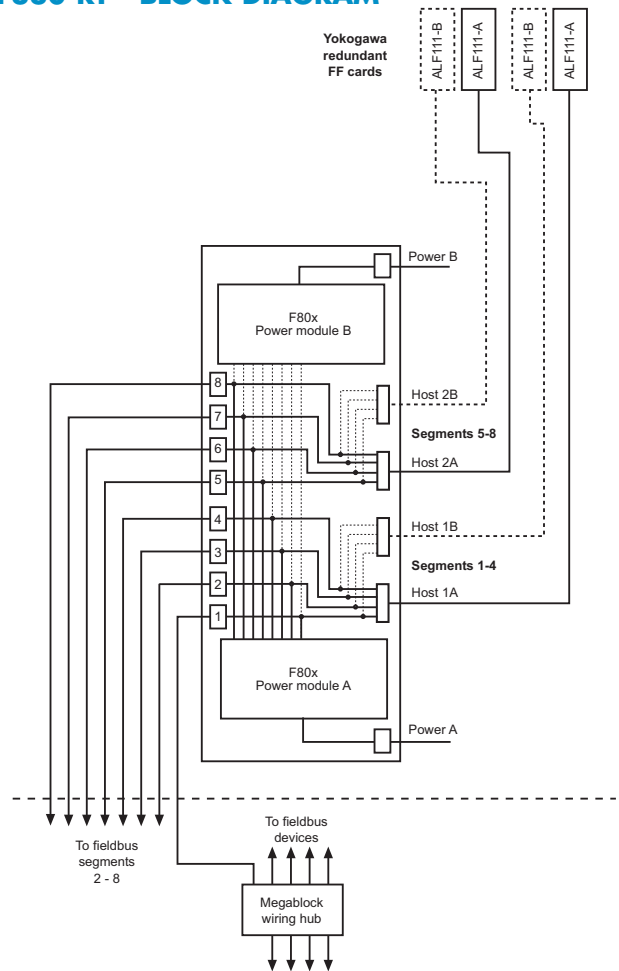

The above diagram shows a block diagram of how the F880-CA-RT is wired. Note that the Chassis Ground and Alarm connection are not shown. The Diagnostic module is also not shown (see the F809F product specification). For detailed wiring information see the Installation Instructions for the F880-RT (Document number 502-139).

PHYSICAL NETWORKS

IEC61158-2
ISA-S50.02 Part 2-1992
FOUNDATION fieldbus™ H1
Profibus PA

ORDERING INFORMATION

DESCRIPTION	PART NO.
Carrier, unpopulated	F880-CA-RT
8-segment power module: 21.5V, 350mA	F801
8-segment power module: 28V, 500mA	F802
F880-CA-RT and two F801 modules	F880-RT
F880-CA-RT and one F801 module	F880-RT-NR
F880-CA-RT and two F802 modules	F880-2-RT
F880-CA-RT and one F802 module	F880-2-RT-NR
Blanking modules included with -NR systems	F800-BLK
Fieldbus diagnostic module	F809F

Product specifications are subject to change without notice



EUROPE (EMEA)
AMERICAS
ASIA PACIFIC





Tel: +44 (0)1582 723633
Tel: +1 281 571 8065
Tel: +65 6 487 7887

Fax: +44 (0)1582 422283
Fax: +1 281 571 8069
Fax: +65 6 487 7997





E-mail: enquiry@mtl-inst.com MTL web site: www.mtl-fieldbus.com Relcom web site: www.relcominc.com

F880-RT:
PS-064 F880-RT Product Specification
Revision: C
www.relcominc.com


F801 PARAMETERS

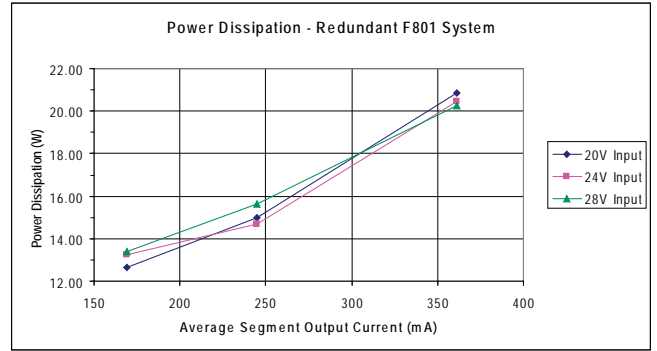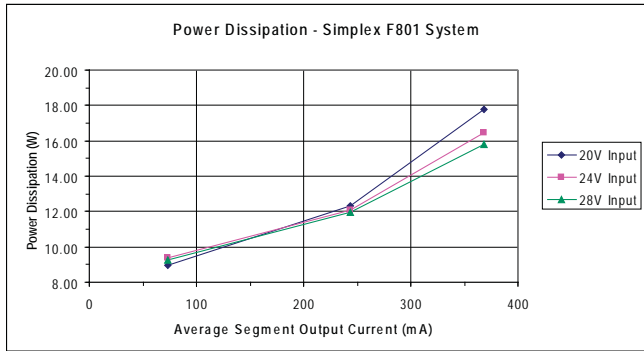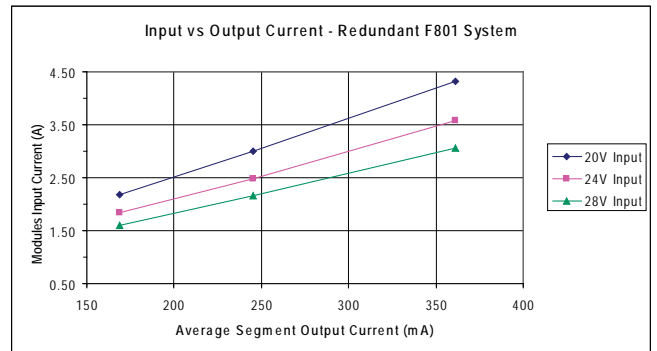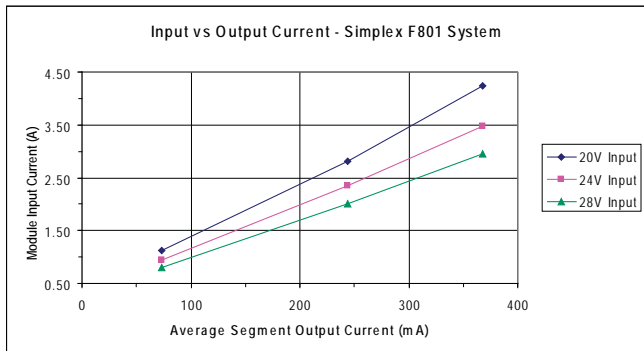


F802 PARAMETERS

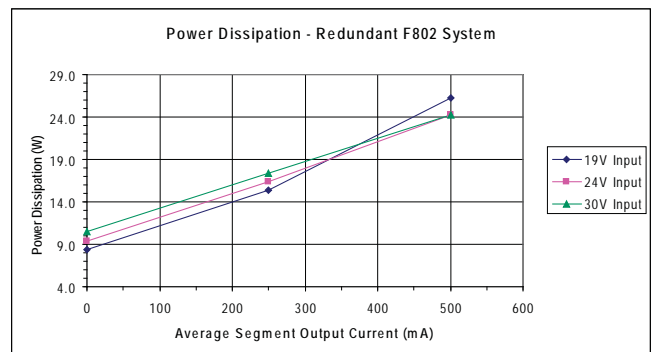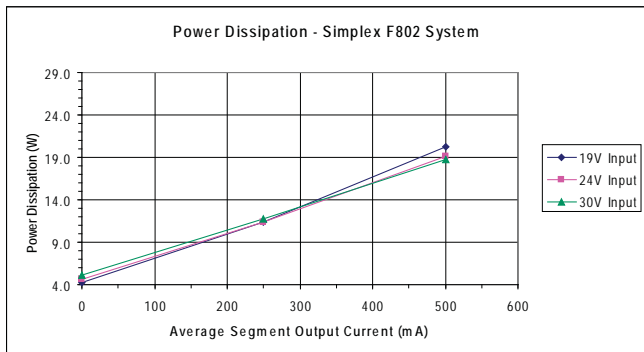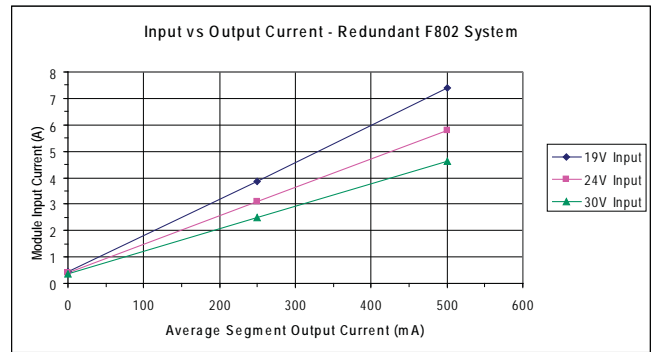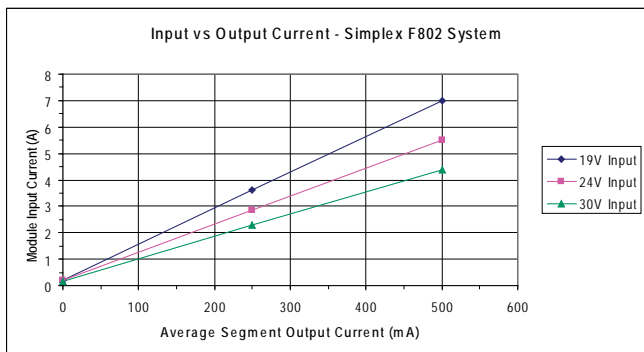

Linking alarm circuits

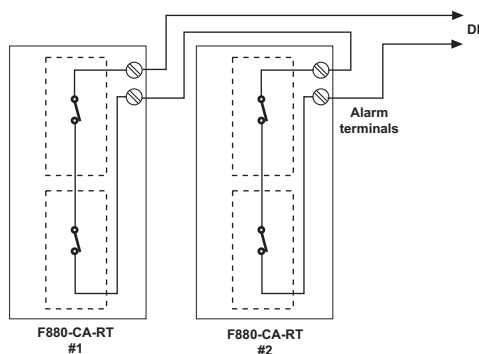

F80x module top panels showing indicators

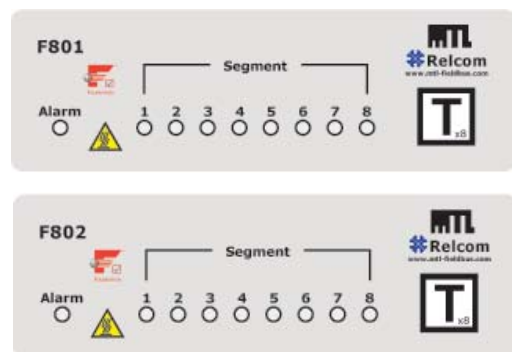

EUROPE (EMEA)
AMERICAS
ASIA PACIFIC




Tel: +44 (0)1582 723633
Tel: +1 281 571 8065
Tel: +65 6 487 7887

Fax: +44 (0)1582 422283
Fax: +1 281 571 8069
Fax: +65 6 487 7997

E-mail: enquiry@mtl-inst.com MTL web site: www.mtl-fieldbus.com Relcom web site: www.relcominc.com

F880-RT:
PS-064 F880-RT Product Specification
Revision: C
www.relcominc.com

F880-RT DIMENSIONS

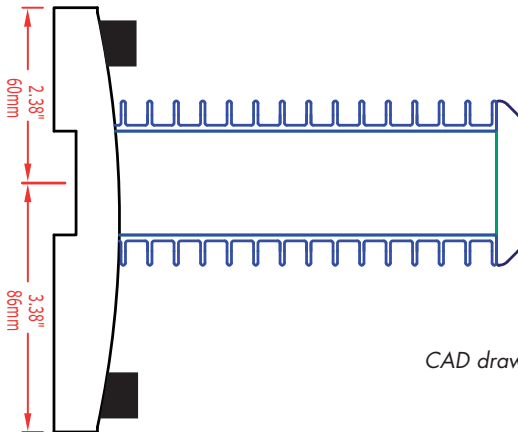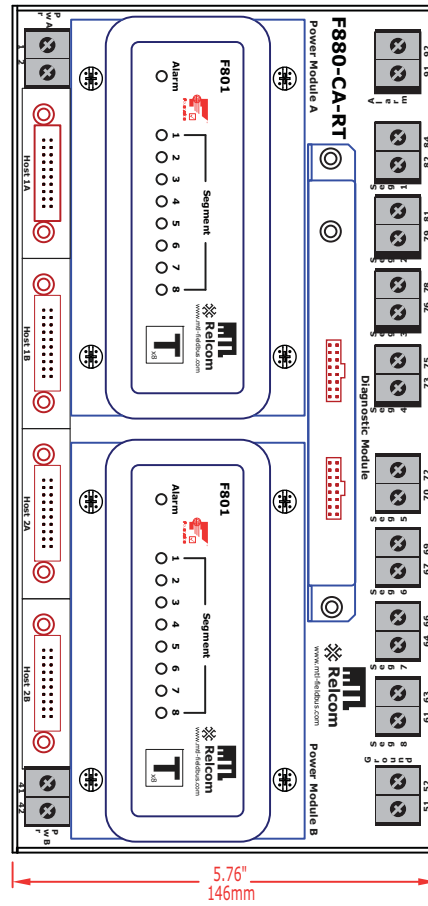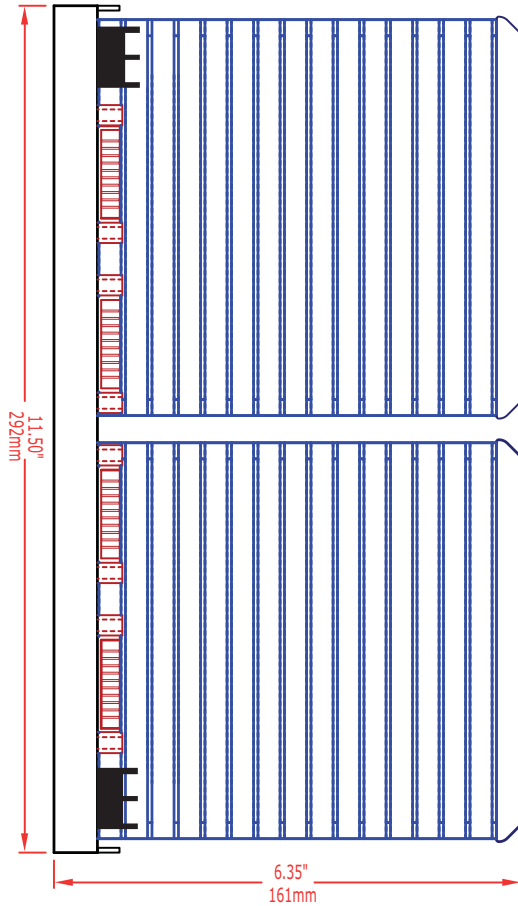

Shown using F801 power modules.
 Overall dimensions are the same
 when F802 modules are fitted.

CAD drawings are available on-line at www.mtl-fieldbus.com

APPROVALS - for the latest certification information visit www.mtl-inst.com/certs_1.nsf

Region (Authority)	Standard	Certificate	Approved for	Ratings
EU (Relcom)	EN61326		Class A Industrial Locations	CE
(FIELD BUS foundation™)	FF-831	PS001700 - (F801) PS001900 - (F802)		Power Supply Type 132
EU (Relcom)	IEC 60079-0:2004 IEC 60079-15:2005	RELCO7ATEX1002X (F801 + F802)	Ex nA IIC T4	U _o = 24V (F801) = 30V (F802)



EUROPE (EMEA)
 AMERICAS
 ASIA PACIFIC

Tel: +44 (0)1582 723633
 Tel: +1 281 571 8065
 Tel: +65 6 487 7887

Fax: +44 (0)1582 422283
 Fax: +1 281 571 8069
 Fax: +65 6 487 7997

E-mail: enquiry@mtl-inst.com MTL web site: www.mtl-fieldbus.com Relcom web site: www.relcominc.com

F880-RT:
 PS-064 F880-RT Product Specification
 Revision: C
www.relcominc.com